Access

Electric Door Strike with Vertical Adjustment

SD-996C-NUVQ

12/24 VDC/VAC, Fail-Safe or Fail-Secure, UL Listed

The SECO-LARM SD-996C-NUVQ Electric Door Strike with Vertical Adjustment is compatible with a wide range of lock types including cylindrical, mortise, and mortise exit devices and can be configured for use in wood, aluminum, or metal doors. Included are various ANSI-sized faceplates to match the door lock type. The strike is easily field-configurable for fail-safe or fail-secure applications.




- 12/24 VDC Operation
- Vertical adjustable deadbolt opening, sliding shim keeper, and deadlatch ramp accommodates a wide range of lock types
- Accommodates deadbolts up to 1"
- Field selectable for fail-safe or fail-secure
- Includes 5 different stainless-steel faceplates
- Includes trim plate to hide gaps in installation
- Reversible non-handed design
- Static strength 1,000 lbs. (454kg)
- Tested to 250,000 cycles (UL Tested)
- Low current draw: 300mA@12VDC & 150mA@24VDC

Specifications:


Operating voltage		12/24 VDC
Current draw	12VDC	300mA
	24VDC	150mA
Operating temperature		14°~113° F (-10°~45° C)
Operating humidity		0~85%
Static strength		1,000 lbs. (454kg)
Dynamic strength		33 ft-lbs. (4.56 m-kgs)
Latch throw		1" (25mm) max with 1/8" (3mm) door gap
Dimensions		1 ¹³ / ₁₆ "x1 ⁵ / ₈ "x3 ⁵ / ₁₆ " (47x42x84 mm)





Five Faceplates Included (see back for details)

Dimensions:






16842 Millikan Avenue, Irvine, CA, 92606

Phone: (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326 **Website:** www.seco-larm.com **Email:** sales@seco-larm.com



Faceplates:

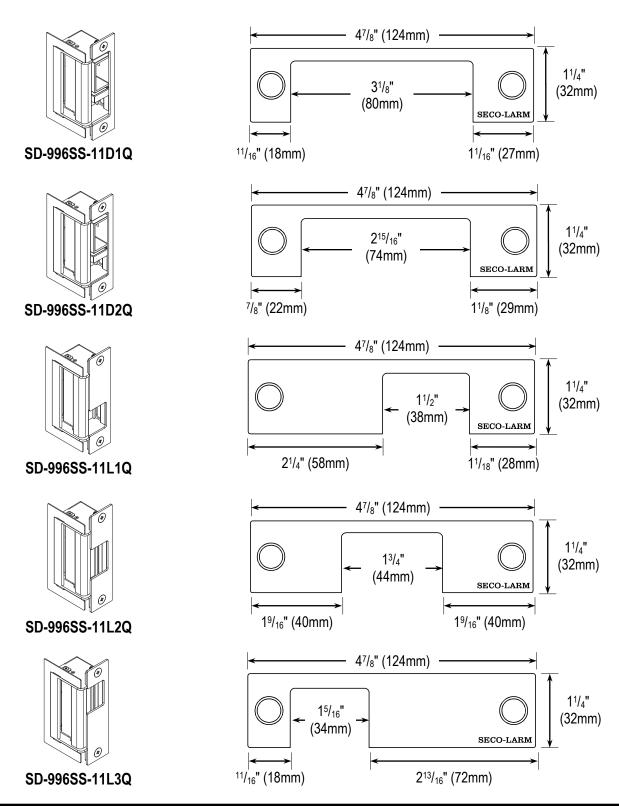

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA, 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326 Website: www.seco-larm.com Email: sales@seco-larm.com

