

HAVEN

Haven Motion Sensor



Pairing & Installation Instructions

Haven Lockdown Motion Sensor

Pairing & Installation Instructions

Tools Needed

- 3/32" drill bit
- Phillips head screwdriver
- Pen or paperclip

Pairing

- 1.) Using a Phillips head screwdriver, unscrew the 4 screws on the front of the motion sensor and remove top to expose the circuit components and batteries in the base as shown below..




- 2.) Make sure coin cell (located on the back of the circuit board) and 9V (backup) batteries are both properly installed.
- 3.) Make sure the cover is off of the Lockdown unit and the Admin button is accessible.

Haven Lockdown Motion Sensor

Pairing & Installation Instructions

- 4.) Use a pen (or similar device) to push and hold down the PAIR button, which is located on the back side of the motion sensor housing until a flashing white light appears on the circuit board of the motion sensor (indicated by the red circle in the pic below).

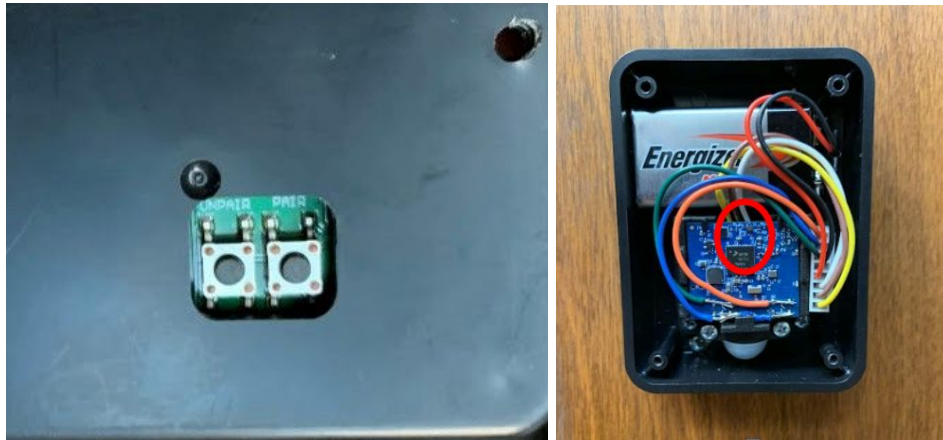

- 5.) Once the motion sensor light is flashing white, press and release the Admin button on the Lockdown unit, and release the PAIR button on the motion sensor AT THE SAME TIME. Make sure the Lockdown unit and the motion sensor are in close proximity during this step.
- 6.) The light on the Lockdown unit and the light on the motion sensor circuit board will cycle together for a few seconds and an audible beep will sound when pairing is complete.
- 7.) Your motion sensor is now paired to your Lockdown unit and will only unlock the unit.

Haven Lockdown Motion Sensor

Pairing & Installation Instructions

Installation

- 1) Once your motion sensor is paired, locate the mounting holes on the back of the motion sensor housing, place the motion sensor housing on the door so that the bottom of the motion sensor is 5 inches above the door handle, and mark your pilot holes.



- 2) Using a 3/32" drill bit, drill your pilot holes for your screws.
- 3) Using a Phillips head screwdriver (or a drill driver with a Phillips head bit) screw motion sensor housing onto the door above the door handle.
- 4) Replace cover and secure the 4 front cover screws using a Phillips head screwdriver.
- 5) Your motion sensor should now be ready to use.
- 6) Test unlocking with motion sensor. Lock the unit, manually or with key fob, place your hand on the door handle. Lockdown should unlock within one second.

Haven Motion Sensor
HavenLock, Inc
Model: HL1-MS-001
Contains FCC ID: 2ARFQHL2FOB001
Contains IC: 24389-HL2FOB001



Haven Lockdown Motion Sensor

Pairing & Installation Instructions

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.