

Track-Mount Overhead Door Magnetic Contacts

SM-4201-LQ

3" (76mm) Gap, Closed Loop

Features:

- Used for overhead doors in both industrial and residential situations where a wide gap is present
- Adjustable to fit most door-channel widths
- Rugged aluminum housing
- 36" (91cm) wire leads enclosed in armored cable
- Contact Type: SPST, iridium-plated to have a high melting point and Vickers hardness for higher power handling and longer expected life
- For closed loop circuits
- 3" (76mm) Gap
- Mounting bracket included
- Lifetime limited warranty



Iridium-Plated Contacts

Ferrite Magnet


36" Armored Leads

3" Gap

Specifications:

Circuit type	Closed loop	
Operation gap	3" (76mm)	
Material	Case	Aluminum
	Terminal	36" (91cm) armored leads
Contacts	Iridium-plated	
Contact rating	0.1A@100VDC (max)	
	1.0A@10VDC (max)	
	10W (max)	
Temperature	-15°~160°F (-25°~70°C)	
Switch cycles	50 Million (0.1mA@5VDC)	
Switch dimensions	37/64"x219/32"x113/16" (79x66x46mm)	
Magnet dimensions	37/32"x317/32"x13/4" (82x90x44mm)	
Magnet type	Ferrite	

Dimensions:

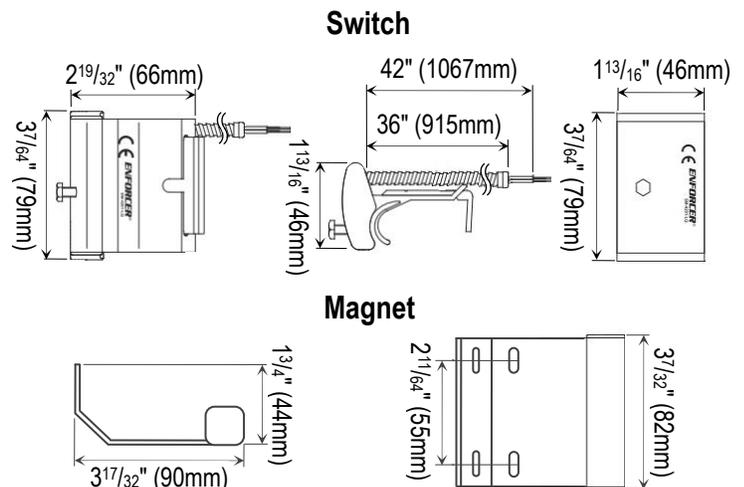

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2015 © SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PISM-4201-LQ_150505.docx