

Stand-Alone Proximity Readers with Wiegand

PR-3123-PQ Mullion Size
PR-3125-PQ Standard Size

Features

- 1,000 Users (up to 998 users and 2 duress users)
- 9~24 VDC Operation with low current draw 90mA max.
- Form C relay output 2A@12VDC
- Adjustable output time 0.5~99s, or toggle
- Built-in tamper alarm and external alarm output
- Multicolor status LED
- EEPROM Memory protects programmed information in case of power loss
- Includes remote programmer
- · Egress input lets users exit the premises without using a card
- Can serve as either Wiegand reader or controller, both output and input are selectable from 26~37 bits
- Compatible with EM125 Proximity Cards (PR-K1S1-A, 10 user cards included) and EM125 Proximity Keyfobs (PR-K1K1-AQ, not included)
- 2-Door interlock
- Extreme cold tolerance to -40° F (-40° C)
- Epoxy-filled ABS plastic housing, outdoor-rated weatherproof IP66
- · Easy duplication of users to additional devices

PR-3123-PQ PR-3125-PQ


Compatible Accessories



Specifications

Model		PR-3123-PQ	PR-3125-PQ
Operating voltage		9~24 VDC	
Current	Standby	30mA@12VDC	
draw	Active	90mA@12VDC (max.)	
Outputs	Form C	NO/NC/C, 2A@12VDC	
	Alarm	Transistor ground, 2.5A@12VDC	
	Wiegand	26~37 bits	
Inputs	Wiegand	26~37 bits, PIN input – 4, 8, or 10 bits	
	Egress	N.O. Ground	
	Door sensor	N.C. Ground	
Card reader type		EM 125kHz	
Operating temperature		-40°~140° F (-40°~60° C)	
Dimensions		1 ⁷ / ₈ "x4 ³ / ₄ "x ¹³ / ₁₆ " (48x120x20 mm)	2 ¹⁵ / ₁₆ "x4 ³ / ₄ "x ¹³ / ₁₆ " (75x120x20 mm)
Weight		4.4-oz (125g)	6.5-oz (185g)

Dimensions

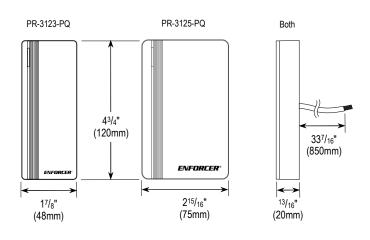

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326 **Website:** www.seco-larm.com **Email:** sales@seco-larm.com

Æ(€®