

## 4-in-1 HD Video Distributor

### VA-1102B-WYQ

1 Input, 2 Outputs

The ENFORCER 4-in-1 HD Video Distributor is the ideal way to distribute a single video signal to multiple locations. Using noise-rejection circuitry, the 4-in-1 HD Video Distributor actively duplicates video signals to be sent to two separate locations.

### Features:


- TVI / CVI / AHD / Analog compatible
- Distributes one video input to two video outputs
- Connect to a video camera, multiplexer, DVR, etc.
- Able to stack multiple units for additional outputs
- Signals are cleaned and buffered to ensure clear video
- LED Power indicator
- Includes power adapter and DC jack connector



### Specifications:

Number of inputs	1x BNC
Number of outputs	2x BNC
Video output format	HD-TVI / CVI / AHD / Analog
Video input level	0.8~1.2Vp-p, 75Ω
Video output level	1Vp-p, 75Ω
Image gain	6dB
Video bandwidth	350MHz, -3dB
Power supply	12VDC, 500mA
Current draw	60mA
Operating humidity	0~95%, non-condensing
Operating temperature	32°~131° F (0°~55° C)
Dimensions	2 <sup>5</sup> / <sub>16</sub> "x1 <sup>15</sup> / <sub>16</sub> "x1 <sup>11</sup> / <sub>16</sub> " (58x49x42 mm)
Weight	2.5-oz (70g)

### Sample Application:

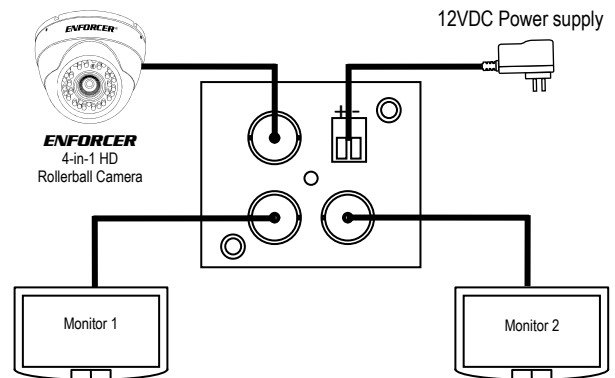

Maximum range between camera and monitor determined by camera's maximum distance

**SECO-LARM® U.S.A., Inc.**

16842 Millikan Avenue, Irvine, CA, 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright © 2017 SECO-LARM U.S.A., Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®**

PI\_VA-1102B-WYQ\_170518.docx